
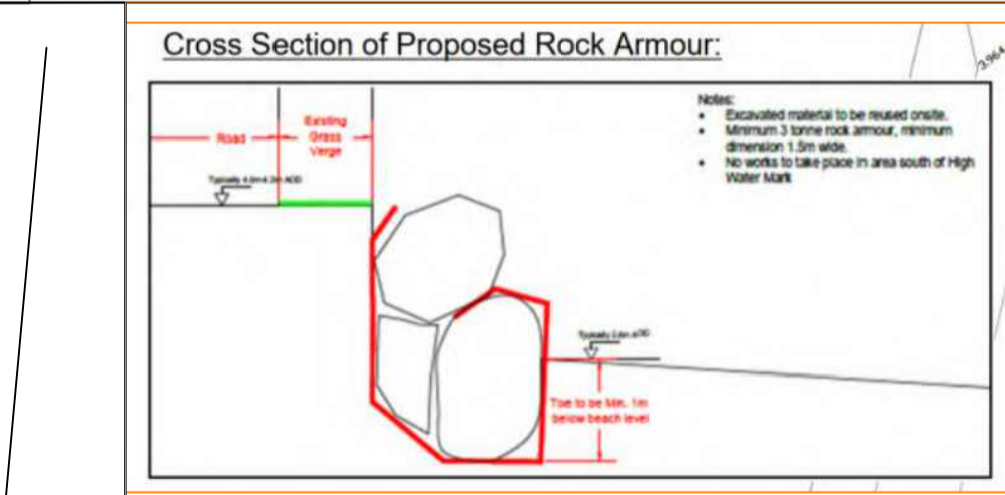


Chainage	Work Required
0m to 4m	Repointing - Stonework
4m to 15m	Concrete Crack Repair
15m to 35m	In situ concrete infill to voids of Existing Sea Wall
35m to 75m	Break up damaged section of existing Sea Defense wall and compact down. Replace with composite concrete and boulder
75m to 100m	In situ concrete infill to voids of Existing Sea Wall
100m to 144m	Concrete Crack Repair
144m to 150m	Repointing - Stonework
150m	In situ concrete infill to voids of Existing Sea Wall
150m to 159m	No Works
159m to 164m	In situ concrete infill to voids of Existing Sea Wall
189m to 229m	Install Rock Armour

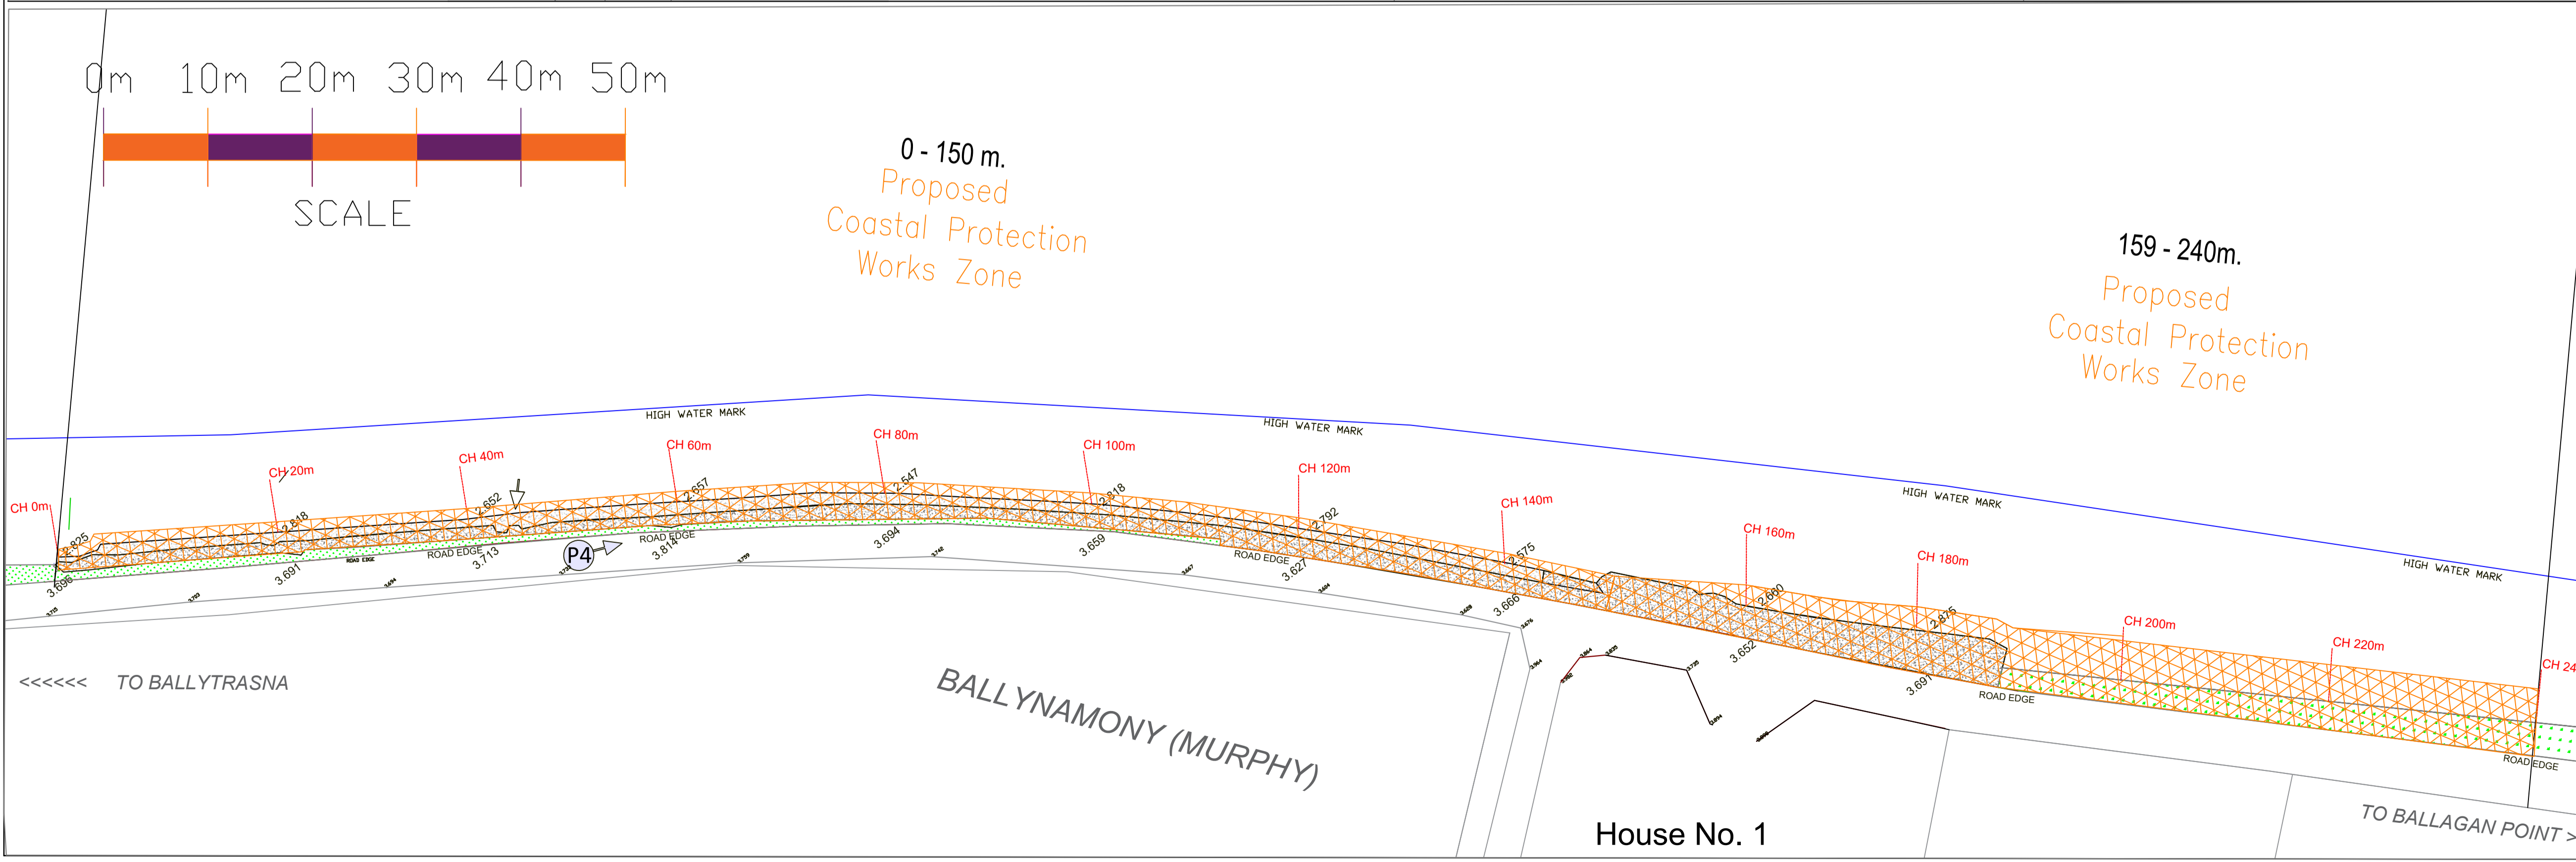

Rev.	Comment	Date

**Comhairle Contae Lú
Louth County Council**
County Hall, Millennium Centre,
Dundalk, County Louth
www.louthcoco.ie
Mr David Jones
Director of Service

Project: Coastal Erosion - Ballinamony (Murphy), Ballagan, County Louth

Drawing Title: Proposed Coastal Protection Haul Road and Work Areas

Designed: Checked PC

Drawn: SOH/JPS Approved:

© Ordnance Survey Ireland. All rights reserved.
OSI Licence Number: 2011/30/CCMA/Louth County Council

Date: October 2023 Dwg. No.
Scale: As Shown (A1) **CE-2021-02-02**